

Summary

- **RoHS Compliant & Halogen Free**
- **Applications:** All high-density boards
- **Product Features:** Small surface mountable , Solid state , Faster time to trip than standard SMD devices, Lower resistance than standard SMD devices
- **Operation Current:** 0.5A~5.0A
- **Maximum Voltage:** 6V
- **Temperature Range :** -40°C to 85°C

Agency Recognition

UL : File No. E211981
 C-UL: File No. E211981
 TÜV: File No. R50090556

Note:

TSMD350-1206RZ~TSMD700-1206RZ UL In Process.
 TSMD260-1206RZ~TSMD700-1206RZ C-UL In Process.

Electrical Characteristics (23°C)

Part Number	Hold Current	Trip Current	Rated Voltage	Max Current	Typical Power	Max Time to Trip		Resistance	
	I _H , A	I _T , A	V _{MAX} , VDC	I _{MAX} , A	P _d , W	Current	Time	R _{MIN}	R _{1MAX}
						A	Sec	Ohms	Ohms
TSMD050-1206RZ	0.50	1.50	6	100	0.8	8.0	0.20	0.025	0.200
TSMD075-1206RZ	0.75	1.80	6	100	0.8	8.0	0.30	0.018	0.180
TSMD110-1206RZ	1.10	2.20	6	100	0.8	8.0	0.30	0.015	0.100
TSMD150-1206RZ	1.50	3.00	6	100	0.8	8.0	0.30	0.010	0.065
TSMD175-1206RZ	1.75	3.50	6	100	0.8	8.0	0.40	0.005	0.030
TSMD200-1206RZ	2.00	4.00	6	100	0.8	8.0	0.50	0.005	0.025
TSMD260-1206RZ	2.60	5.20	6	100	0.8	8.0	4.00	0.003	0.026
TSMD300-1206RZ	3.00	6.00	6	100	0.8	8.0	4.00	0.003	0.020
TSMD350-1206RZ	3.50	7.00	6	100	0.8	8.0	5.00	0.003	0.018
TSMD380-1206RZ	3.80	8.00	6	100	0.8	8.0	5.00	0.002	0.014
TSMD450-1206RZ	4.50	9.00	6	100	0.8	22.5	2.00	0.001	0.014
TSMD500-1206RZ	5.00	10.00	6	100	0.8	25.0	5.00	0.002	0.010

I_H=Hold current-maximum current at which the device will not trip at 23°C still air.

I_T=Trip current-minimum current at which the device will always trip at 23°C still air.

V_{MAX}=Maximum voltage device can withstand without damage at it rated current.(I_{MAX})

I_{MAX}= Maximum fault current device can withstand without damage at rated voltage (V_{MAX}).

P_d=Typical power dissipated-type amount of power dissipated by the device when in the tripped state in 23°C still air environment.


R_{MIN}=Minimum device resistance at 23°C prior to tripping.

R_{1MAX}=Maximum device resistance at 23°C measured 1 hour post trip.

Termination pad characteristics

Termination pad materials: Pure Tin


NOTE : Specification subject to change without notice.

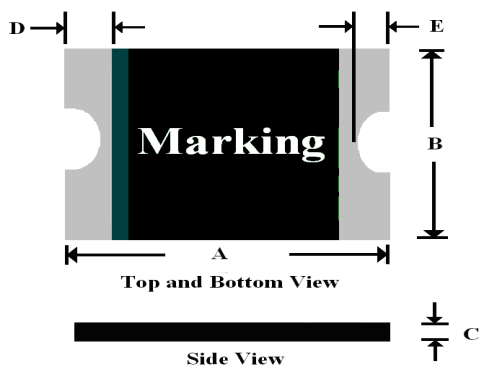TSMD Product Dimensions (Millimeters)


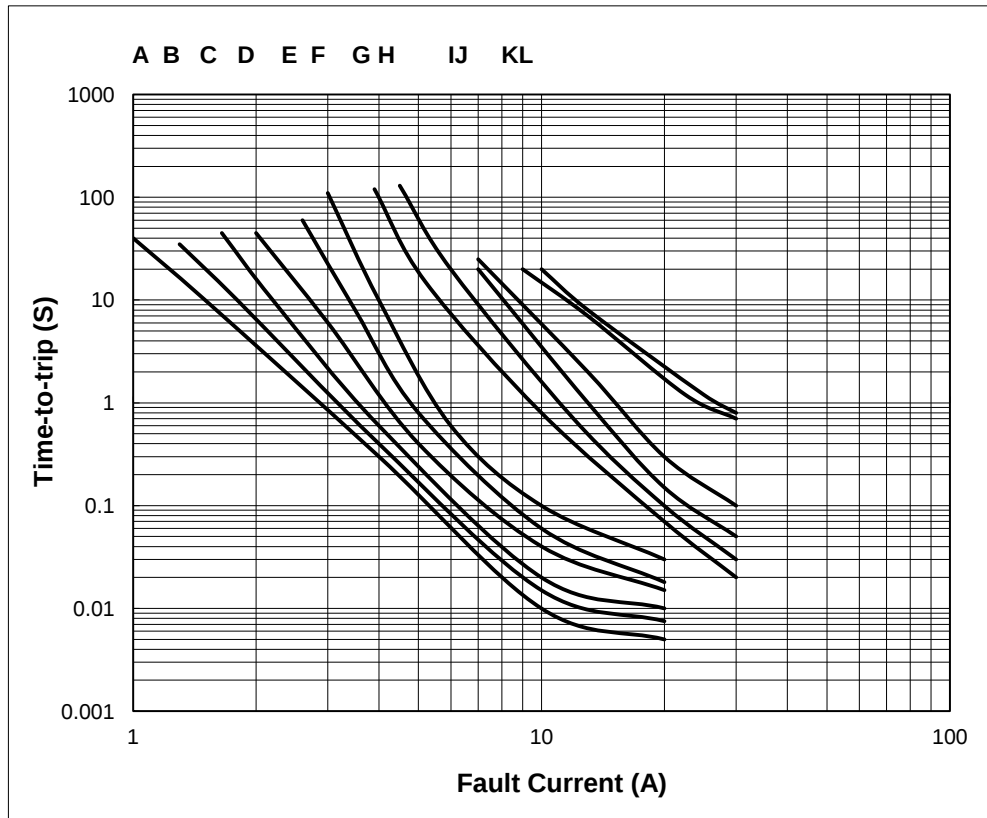
Part Number	A		B		C		D		E	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
TSMD050-1206RZ	3.00	3.50	1.50	1.80	0.40	0.75	0.25	0.75	0.10	0.45
TSMD075-1206RZ	3.00	3.50	1.50	1.80	0.40	0.75	0.25	0.75	0.10	0.45
TSMD110-1206RZ	3.00	3.50	1.50	1.80	0.40	0.75	0.25	0.75	0.10	0.45
TSMD150-1206RZ	3.00	3.50	1.50	1.80	0.40	0.75	0.25	0.75	0.10	0.45
TSMD175-1206RZ	3.00	3.50	1.50	1.80	0.40	0.75	0.25	0.75	0.10	0.45
TSMD200-1206RZ	3.00	3.50	1.50	1.80	0.40	0.75	0.25	0.75	0.10	0.45
TSMD260-1206RZ	3.00	3.50	1.50	1.80	0.60	1.00	0.25	0.75	0.10	0.45
TSMD300-1206RZ	3.00	3.50	1.50	1.80	0.60	1.00	0.25	0.75	0.10	0.45
TSMD350-1206RZ	3.00	3.50	1.50	1.80	0.60	1.00	0.25	0.75	0.10	0.45
TSMD380-1206RZ	3.00	3.50	1.50	1.80	0.60	1.00	0.25	0.75	0.10	0.45
TSMD450-1206RZ	3.00	3.50	1.50	1.80	0.60	1.00	0.25	0.75	0.10	0.45
TSMD500-1206RZ	3.00	3.50	1.50	1.80	0.80	1.40	0.25	0.75	0.10	0.45

NOTE : Specification subject to change without notice.

Thermal Derating Curve

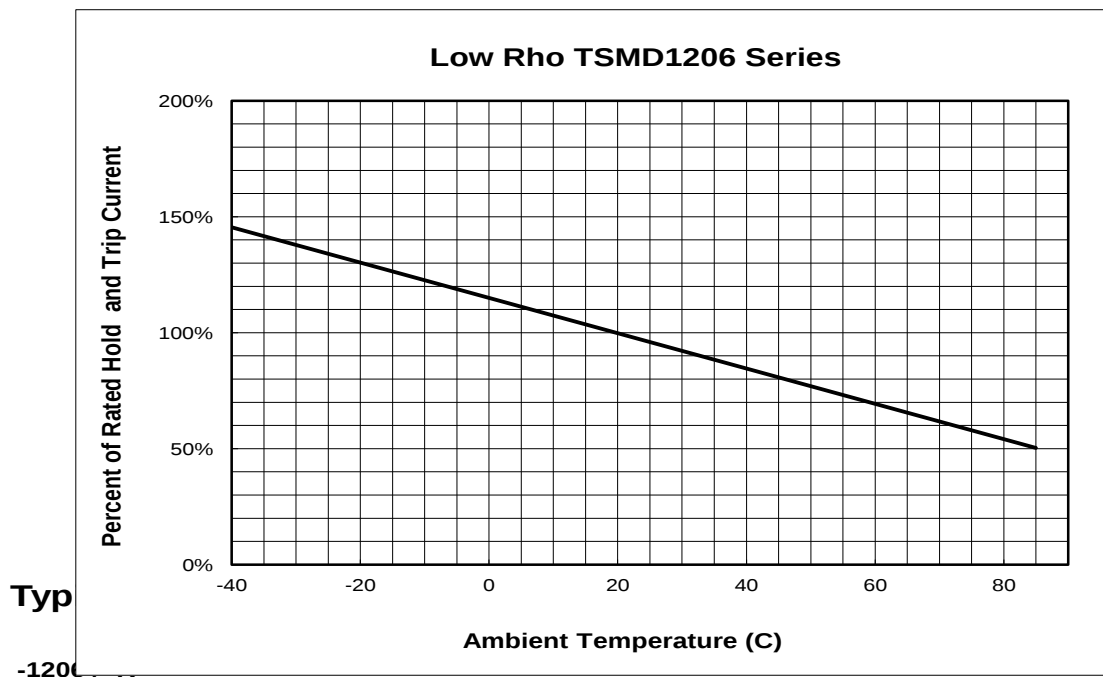

- A = TSMD050-1206RZ
- B = TSMD075-1206RZ
- C = TSMD110-1206RZ
- D = TSMD150-1206RZ
- E = TSMD175-1206RZ
- F = TSMD200-1206RZ
- G = TSMD260-1206RZ
- H = TSMD300-1206RZ
- I = TSMD350-1206RZ
- J = TSMD380-1206RZ
- K = TSMD450-1206RZ
- L = TSMD500-1206RZ



NOTE : Specification subject to change without notice.


Material Specification

Terminal pad material: Pure Tin


Soldering characteristics: Meets EIA specification RS 186-9E, ANSI/J-std-002 Category 3

Part Numbering and Marking System

Part Numbering System

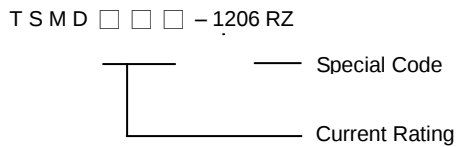

Part Marking System

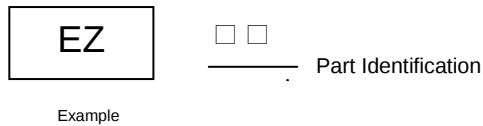

EZ = TSMD050-1206RZ
 FZ = TSMD075-1206RZ
 HZ = TSMD110-1206RZ
 JZ = TSMD150-1206RZ
 KZ = TSMD175-1206RZ
 MZ = TSMD200-1206RZ
 QZ = TSMD260-1206RZ
 SZ = TSMD300-1206RZ
 VZ = TSMD350-1206RZ
 WZ = TSMD380-1206RZ
 YZ = TSMD450-1206RZ
 ZZ = TSMD500-1206RZ


Warning: -Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.



- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.

Pad Layouts 、Solder Reflow and Rework Recommendations

The dimension in the table below provide the recommended pad layout for each Low Rho TSMD1206 device



Pad dimensions (millimeters)

Device	A Nominal	B Nominal	C Nominal
All TSMD1206 Series	2.00	1.00	1.90

Profile Feature	Pb-Free Assembly
Average Ramp-Up Rate (T _{smax} to T _p)	3 °C/second max.
Preheat :	
Temperature Min (T _{smin})	150 °C
Temperature Max (T _{smax})	200 °C
Time (t _{smin} to t _{smax})	60-180 seconds
Time maintained above:	
Temperature(T _L)	217 °C
Time (t _L)	60-150 seconds
Peak/Classification Temperature(T _p) :	260 °C
Time within 5°C of actual Peak :	
Temperature (t _p)	20-40 seconds
Ramp-Down Rate :	6 °C/second max.
Time 25 °C to Peak Temperature :	8 minutes max.

Note 1: All temperatures refer to of the package,
measured on the package body surface.

Solder reflow

- ※ Due to “Lead Free” nature, Temperature and Dwelling time for the soldering zone is higher than those for Regular. This may cause damage to other components.
1. Recommended max past thickness > 0.25mm.
 2. Devices can be cleaned using standard methods and aqueous solvent.
 3. Rework use standard industry practices.
 4. Storage Environment : < 30°C / 60%RH

Caution:

1. If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.
2. Devices are not designed to be wave soldered to the bottom side of the board.

Reflow Profile

